

Applicable MIL-STD-810C/D/E/F

| Applicable MIL-STD | 810C | | 810D | | 810E | | 810F | |
|--------------------|---------|------------|---------|------------|---------|------------|---------|------------|
| | Methods | Procedures | Methods | Procedures | Methods | Procedures | Methods | Procedures |
| Low Pressure | 500.1 | 1 | 500.2 | 1,2 | 500.3 | 1,2 | 500.4 | 1 |
| High Temperature | 501.1 | 1,2 | 501.2 | 1,2 | 501.3 | 1,2 | 501.4 | 1,2 |
| Low Temperature | 502.1 | 1 | 502.2 | 1,2 | 502.3 | 1,2 | 502.4 | 1,2 |
| Temp. Shock | 503.1 | 1 | 503.2 | 1 | 503.3 | 1 | 503.4 | 1 |
| Solar Radiation | 505.1 | 1 | 505.2 | 1 | 505.3 | 1 | 505.4 | 1,2 |
| Rain | 506.1 | 2 | 506.2 | 2 | 506.3 | 1,2 | 506.4 | 1,2 |
| Humidity | 507.1 | 2 | 507.2 | 2,3 | 507.3 | 2,3 | 507.4 | 1 |
| Salt Fog | 509.1 | 1 | 509.2 | 1 | 509.3 | 1 | 509.4 | 1 |
| Dust | 510.1 | 1 | 510.2 | 1 | 510.3 | 1 | 510.4 | 1 |
| Vibration | 514.2 | 8,10 | 514.3 | 1 | 514.4 | 1 | 514.5 | 1 |
| Shock | 516.2 | 1,2,5 | 516.3 | 1,4 | 516.4 | 1,4 | 516.5 | 1,4 |

General

| | |
|---|-----------------------------|
| Frequency Range(MHz) | 446.00625 MHz-446.09375 MHz |
| Channel Capacity | 16 |
| Channel Spacing(KHz) | 12.5KHz |
| Operating Voltage(V) | 7.4V |
| Standard Battery | 1650mAh (Li-Ion) |
| Battery Life (5-5-90 Duty Cycle) | Up to 24 hours |
| Frequency Stability(ppm) | ± 2.5 ppm |
| Operating Temperature(°C) | -25°C ~ +60°C |
| Antenna Impedance(Ω) | 50 Ω |
| Dimensions (H × W × D)(with battery, without antenna)(mm) | 113x54x35mm |
| Weight (with antenna & battery)(g) | 270g |

Transmitter

| | |
|------------------------|---------------------------------|
| RF Output Power | 0.5W |
| Modulation | 8K Φ F3E |
| Spurious and Harmonics | ≤-36dBm (<1GHz) ≤-30dBm (>1GHz) |
| FM Noise | ≤ -38dB |
| Audio Distortion | ≤ 5% |

All Specifications are tested according to ETSI EN 300 296, and subject to change without notice due to continuous development.

Receiver

| | |
|-----------------------------|-----------------------------------|
| Sensitivity | ≤ 0.282 μ V |
| Selectivity | ≥ 60dB |
| Intermodulation | ≥ 60dB |
| Spurious Response Rejection | ≥ 70dB |
| S/N | ≥ 40dB |
| Rated Audio Power Output | 800mW (Speaker impedance: 16 ohm) |
| Rated Audio Distortion | ≤ 5% (800mW) |



www.hytera.cn

Hytera Communications Corporation Limited

HYT is a registered trademark of Hytera

Address:HYT Tower, Hi-Tech Industrial Park North, Beihuan RD., Nanshan District,Shenzhen,China
Tel : +86-755-2697 2999 Fax : +86-755-8613 7139 Post : 518057


© 2010 Hytera,Co.,Ltd. All Rights Reserved.

HYTERA retains right to change the product design and specification. Should any printing mistake occur, HYTERA doesn't bear relevant responsibility.Little difference between real product and product indicated by printing materials will occur by printing reason.

Your Local Dealer

TC-446S

**Professional
License-free Radio**

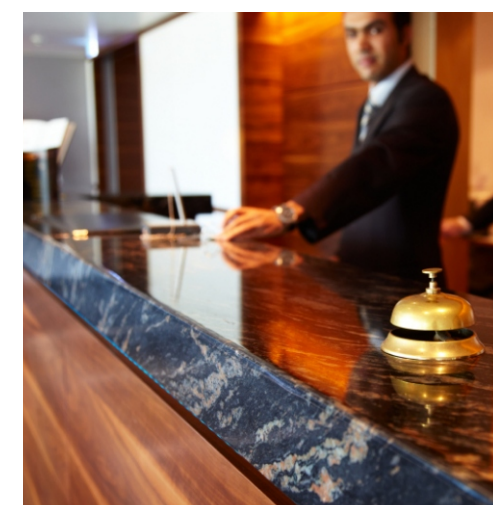

- License-free Radio
- Light Weight and Tough Design
- Longer Battery Life
- Enhanced Voice Quality

As a combination of cutting-edge analog technologies and user-centered design, TC-446S gives an edge to your productivity and management efficiency. With its compact design and lightweight chassis, this tough radio is an ideal choice for management in facilities, hospitality, manufacturing, retail, education and construction. Besides, TC-446S provides up to 24 hours of battery life to ensure long-lasting performance and convenience. Affordable price and distinct performance - TC-446S deserves your trust.

TC-446S

Professional License-free Radio

Product Features

License-free Radio

With TC-446S, you can enjoy charge-free communication easily.

Light Weight and Tough Design

TC-446S has a light-weight but exceptionally strong body, allowing it to be carried about easily and to survive harsh conditions.

Longer Battery Life

TC-446S is equipped with a 1650mAh battery that enables you to transmit and receive, on a 5-5-90 basis, for up to 24 hours.

Enhanced Voice Quality

TC-446S employs advanced voice technologies to better the sound quality during your communication.

Applications

- Facilities
- Hospitality
- Manufacturing
- Retail
- Education
- Construction

Main Features

- Voice-operated Transmit (VOX)
- Battery Strength Indicator
- Monitor
- CTCSS/CDCSS and Squelch Tail Elimination
- Scan
- Battery Save
- Low Battery Alert
- Busy Channel Lockout
- Time-out Timer (TOT)
- PC Programmable
- Wired Clone
- Two Squelch Levels Selectable



Accessories

| | | |
|----------------------|---|---|
| Standard Accessories | Li-Ion Battery (1650mAh) BL1719 Switching Power Ps1018 | Rapid-rate Charger (for Li-Ion Battery) CH10L12 Belt Clip Bc12 Strap RO03 |
|----------------------|---|---|

Featured Optional Accessories



Six-unit Switching Power PS7002
(The power cable may vary in different countries and areas)




Diagram for use:
The six-unit switching power works with multiple standard chargers.

★ Highlights: This six-unit switching power can work with multiple standard chargers simultaneously, making it an ideal choice for large-scale groups and labor-intensive activities.


Optional Accessories




Li-Ion Battery (1300mAh) BL1301



Vehicle Power Adapter CHV09




Earbud with in-line PTT & VOX ESM11




Earbud with on-MIC PTT & VOX ESM12



D-earset with Boom Microphone & VOX EHM16



D-earset with in-Line MIC & VOX EHM15




Earpiece with on-MIC PTT & VOX & Transparent Acoustic Tube EAM12




Nylon Carrying Case (non-swivel) (black) NCN001



Remote Speaker Microphone SM08M3



Receive-Only Earbud (for use with remote speaker microphone) ESS07



Receive-Only Earpiece with Transparent Acoustic Tube (for use with remote speaker microphone) ESS08



Cloning Cable CP05

★ Programming Cable (COM Port) PC19
Programming Cable (USB to Serial Port) Pc26

